

Features



- *Composition
 - *PES 100%
- *Weight (gr/m2)
 - *13,25 gr/m2
- * Size (m)
 - *44 m




Especificaciones

- Abrasion resistance:**
 - UNE EN ISO 12947
 - 100.000 cycles
- Pilling Resistance:**
 - ISO DIS 12945-2
 - 5 | No pilling
- Fire Retardant:**
 - UNE EN 1021:2006-1
 - BS 5852-1
- Tearing Resistance:**
 - UNE EN ISO 13937-3
 - Warp | 120N
 - Weave | 195N
- Wash Fastness:**
 - ISO 105 - C06
 - 5 | Good
- Colour fastness dry friction:**
 - ISO 105 - X12
 - 5 | Excelent
- Colour fastness to light:**
 - ISO 105 - B02
 - 5 | Good
- Shrinking:**
 - UNE EN ISO 5077
 - Warp | 2%
 - Weave | 1%

Cleaning

- Machine-washable (max. 30C)
- Do not use bleach
- Do not tumble dry
- Dry wash
- Do not iron

Colours

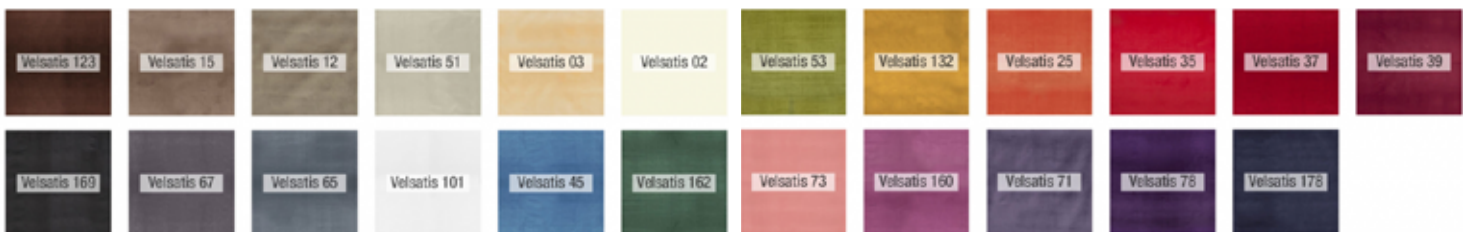

VELSATIS is made by TEXTAAFOAM



FAMA SOFAS S.L.U.
 C/ Dr. Barraquer | Roviral, 1 - P.O.Box 41
 30510 YECLA (Murcia) SPAIN
 Telf: 968751050 / info@fama.es / www.fama.es